

**LED INSPECTION LAMP SLIMLINE PRO (800 LUMEN)**  
**USER GUIDE (MP4058)**



**IMPORTANT SAFETY INSTRUCTIONS**

- Fully charge the device before first use.
- Do not use the lamp in the immediate vicinity of inflammable materials or gases.
- Do not cover the product during operation.
- Only ever use this product in conjunction with the accessories supplied.
- This product is not to be used by children unsupervised.
- Refrain from directing the output of the lamp directly into your eyes
- Thoroughly inspect the device and its accessories prior to each use. If any component is damaged, the product should not be used.

## COMPONENTS



### Box contains:


- 1 x LED Inspection Lamp
- 1 x USB Cable

## CHARGING

The device is charged directly by a USB cable supplied.

- Connect the micro USB plug into the charging socket (H)
- Connect the type A USB plug to a 5V 1A supply
- The battery charging status can be confirmed by the illumination of four green LED status lights on the rear face of the torch (G) Once all four LEDs are permanently illuminated the charge process is complete.
- Fully charge the device at least once every three months to ensure the condition of the battery is maintained.

## OPERATION

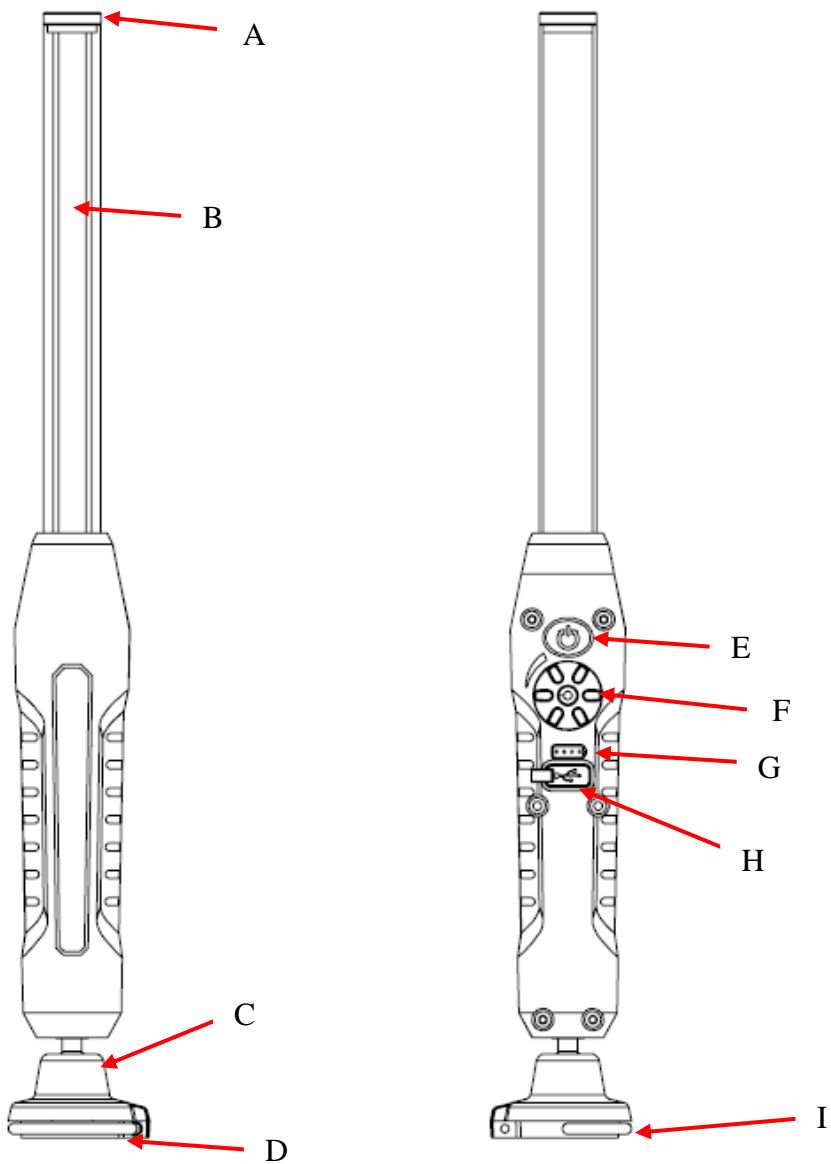

- A). 140lm 1W LED spot light
- B). 800lm 10W COB inspection light
- C). Multi angle base
- D). Magnet
- E). Power button
- F). Dimmer
- G). LED charging indicator
- H). USB charging socket
- I). Metal hanging hook

### On/off switch

- Single press – main inspection light will illuminate
- Second press – LED spot light will illuminate
- Third press – Off

### Note

- If the torch is allowed to remain in any one mode for over three seconds, the next press of the button will switch the device off.

### Dimmer

The dimmer (F) can be used to adjust the intensity of the spot light (A) and COB inspection light (B) from 10% to 100% output.

## TECHNICAL SPECIFICATIONS

Part No	MP4058
Light output	800 Lumen (High). 140 Lumen (Spot Light)
CRI	80
Lithium ion battery	3.7V 2,500mAh
Charging period	Approx 4hrs
Usage period	Approx 2-10hrs
Ambient temperature	-10° - +45°C
Colour temperature	6,500k (Cool white)
Protection class	III
Charging input	5V DC 1A
IP Rating	1P67
IK Rating	IK08

## ENVIRONMENTAL PROTECTION



Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

### Declaration

This apparatus meets the requirements of:

EMC EN55015:2013 + A1:2015; EN61000-3-2:2014; EN61000-3-3:2013; EN61547:2009

LVD EN60598-2-4:2018; EN60598-1:2015+A1:2018; EN62493:2015

RoHS Directive 2011/65/EU (RoHS 2.0) and its subsequent amendments Directive (EU) 2015/863.

A handwritten signature in black ink, appearing to read 'S. J. Cole'.

Technical Manager, Maypole Ltd, June 2020

Email: [sales@maypoleltd.co.uk](mailto:sales@maypoleltd.co.uk)

Web: [www.maypole.ltd.uk](http://www.maypole.ltd.uk)